


PJ-HTK

热缩电缆终端头 1-36KV

特点及用途：

PJ-HTK热缩缩电缆终端可用于室内和室外的应用单芯和三芯电缆1kV直到36kV 的终端安装。热缩电缆电缆终端套件包括所有必要的组件用于安装。

- 安装简单快捷，不需要额外的工具；
- 紧密密封，高回弹即使经过长年老化和暴露。

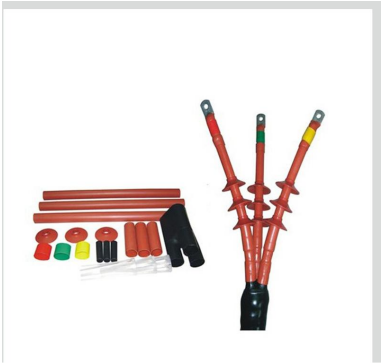

产品规格				
电压范围 U0 /U (Um)	芯数	电缆截面积/mm²	产品型号	
			户内终端	户外终端
18/30kV(36)	3,1	35-50	18/30kV PJ-HTI-3/1(1/1)	18/30kV PJ-HTO-3/1(1/1)
		70-120	18/30kV PJ-HTI-3/2(1/2)	18/30kV PJ-HTO-3/2(1/2)
		150-240	18/30kV PJ-HTI-3/3(1/3)	18/30kV PJ-HTO-3/3(1/3)
		300-400	18/30kV PJ-HTI-3/4(1/4)	18/30kV PJ-HTO-3/4(1/4)
		500-630	18/30kV PJ-HTI-3/5(1/5)	18/30kV PJ-HTO-3/5(1/5)
12/20kV(24)	3,1	35-50	12/20kV PJ-HTI-3/1(1/1)	12/20kV PJ-HTO-3/1(1/1)
		70-120	12/20kV PJ-HTI-3/2(1/2)	12/20kV PJ-HTO-3/2(1/2)
		150-240	12/20kV PJ-HTI-3/3(1/3)	12/20kV PJ-HTO-3/3(1/3)
		300-400	12/20kV PJ-HTI-3/4(1/4)	12/20kV PJ-HTO-3/4(1/4)
		500-630	12/20kV PJ-HTI-3/5(1/5)	12/20kV PJ-HTO-3/5(1/5)
8.7/15kV(17.5)	3,1	25-50	8.7/15kV PJ-HTI-3/1(1/1)	8.7/15kV PJ-HTO-3/1(1/1)
		70-120	8.7/15kV PJ-HTI-3/2(1/2)	8.7/15kV PJ-HTO-3/2(1/2)
		150-240	8.7/15kV PJ-HTI-3/3(1/3)	8.7/15kV PJ-HTO-3/3(1/3)
		300-400	8.7/15kV PJ-HTI-3/4(1/4)	8.7/15kV PJ-HTO-3/4(1/4)
		500-630	8.7/15kV PJ-HTI-3/5(1/5)	8.7/15kV PJ-HTO-3/5(1/5)
6/10kV(12)	3,1	25-50	6/10kV PJ-HTI-3/1(1/1)	6/10kV PJ-HTO-3/1(1/1)
		70-120	6/10kV PJL-HTI-3/2(1/2)	6/10kV PJ-HTO-3/2(1/2)
		150-240	6/10kV PJ-HTI-3/3(1/3)	6/10kV PJ-HTO-3/3(1/3)
		300-400	6/10kV PJ-HTI-3/4(1/4)	6/10kV PJ-HTO-3/4(1/4)
		500-630	6/10kV PJ-HTI-3/5(1/5)	6/10kV PJ-HTO-3/5(1/5)
0.6/1kV(1.2)	4, 5, 3, 2, 1	4-6	0.6/1kV PJ-HT-4(5,3,2,1)/(-1)	
		10-16	0.6/1kV PJ-HT-4(5,3,2,1)/0	
		25-50	0.6/1kV PJ-HT-4(5,3,2,1)/1	
		70-120	0.6/1kV PJ-HT-4(5,3,2,1)/2	
		150-240	0.6/1kV PJ-HT-4(5,3,2,1)/3	
		300-400	0.6/1kV PJ-HT-4(5,3,2,1)/4	